

Telephones

Telephone Programming Options

These telephone sets are equipped with field programmable memory locations with ability to program special options with a maximum of 32 digits per location.


GB59V	(p. 62)	GB524V	(p. 68)
GB70V	(p. 63, 78)	GB259V	(p. 61- 62)
GB72V	(p. 63, 78)	GB306V	(p. 70)
GB90V	(p. 61)	GB2512V	(p. 70)
GB92V	(p. 61)	GB2523V	(p. 68)
GB252V	(p. 66)	GB2524V	(p. 68)
		GB2554V	(p. 69)

Ordering Information

- Option A** 2 Number Auto Dialer, less dial pad
- Option B** 10 Number Auto Dialer, with dial pad
- Option C** 20 Number Auto Dialer, with dial pad
- Option E** 50 Number Auto Dialer, with dial pad
- Option TR** Toll Restriction
1. Restricts 411
 2. Number 1 as first digit - (Restricts long distance call)
 3. Number 0 as first digit - (Restricts international call)
 4. Restricted number of digits being dialed.
- Ex: If number 3 is programmed, the user can only push 3 digits on the dial, the 4th digit is blocked out.



GB59VAH-LH
(Less housing)

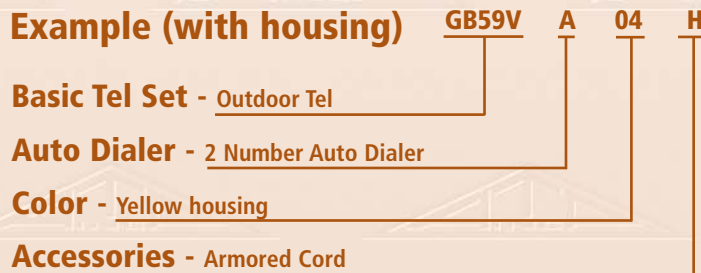

Note:

1. Line Powered with no batteries or AC power requirement
2. Compatible with 24 and 48 volt PBX Systems
3. **Not** recommended for temperatures below -5°F (-20°C)
4. These phones are not compatible with Noise Canceling Transmitters
5. Special Silk Screen is available on special orders
6. Operating Instructions included with each telephone