


NOTE:
DIMENSIONS IN INCHES [mm]

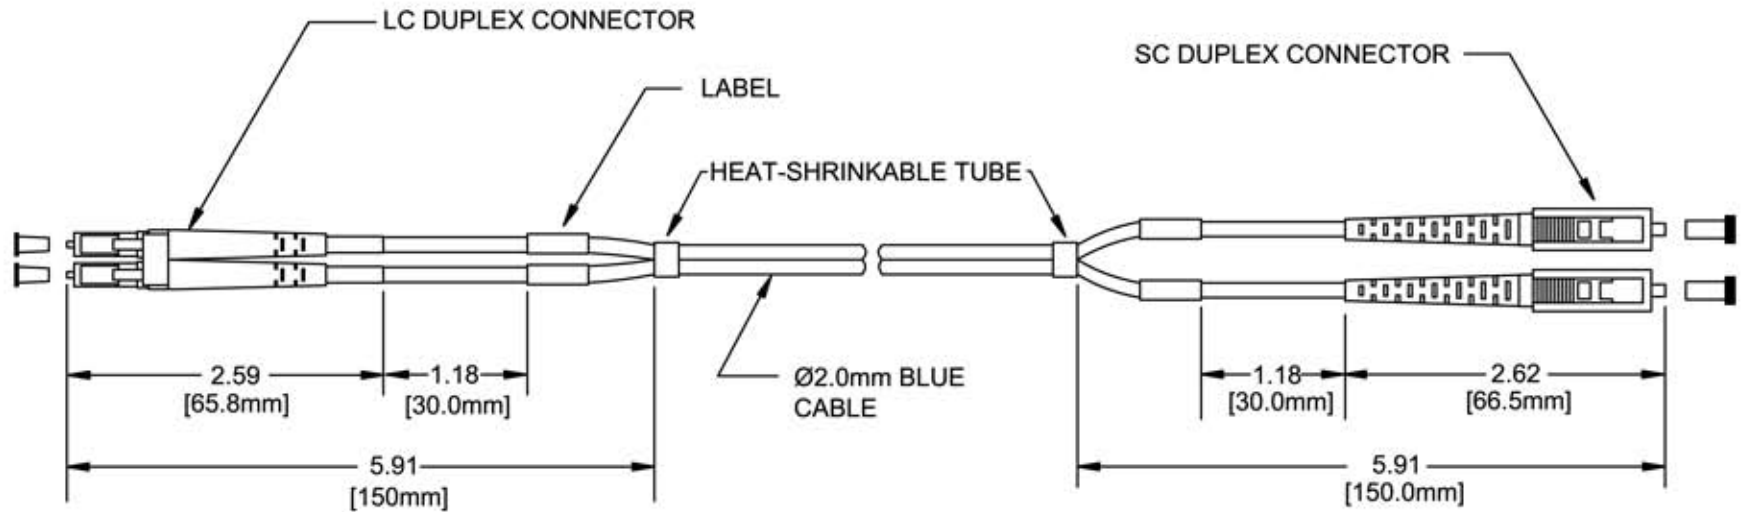

SPECIFICATIONS

| PARAMETER | UNITS | |
|------------------------|-------|---------|
| FERRULE ID | um | 127 |
| INSERTION LOSS | dB | <0.3 |
| DURABILITY (500 TIMES) | dB | <0.3 |
| OPERATING TEMPERATURE | °C | -40~+85 |
| STORAGE TEMPERATURE | °C | -40~+85 |
| TYPICAL CABLE OD | mm | Ø2.0 |

FEATURES

- * SC CONNECTORS ARE COMPLIANT IEC 60874-14; F04 (JIS C5973); TIA/EIA-604-3A
- * LC CONNECTORS ARE COMPLIANT TIA/EIA-640-10; LUCENT: 640-252-256
- * PRODUCT QUALITY COMPLY WITH GR-326-CORE

PART#: GBLCC-D3-XX

LENGTH (METERS)

01, 02, 03, 04, 05, 06, 07,
08, 09, 10, 15, 20, 25, 30



Allen Tel Products, Inc.

30 TV5 DRIVE • HENDERSON, NV • 89014

**GBLCC-D3-XX LC TO SC DUPLEX
MULTIMODE 50/125 (BLUE JACKET)**

