

MATERIAL:

PLASTIC BODY POLYCARBONATE (PC)
FLAME RATING - 94VO

CONTACT BLADE:

HIGH STRENGTH COPPER ALLOY

PLATING:

FIFTY MICRO INCHES OF GOLD SELECTIVELY
PLATED OVER 100 MICRO INCHES OF NICKEL

ELECTRICAL:

DIELECTRIC WITHSTANDING VOLTAGE 500 VAC
INSULATION RESISTANCE 500 MEGOHMS
TERMINAL RESISTANCE 35 MILLIOHMS
TERMINAL RATING 250 VAC MAX AT 2 AMPS

MECHANICAL:




MINIMUM CONTACT FORCE - 100 GRAMS
INSERTION FORCE LESS THAN 5 LBS.
PULL OFF FORCE - 10 LBS. MIN.
DURABILITY - 200MATING CYCLES
CORD PULL OFF FORCE - 15 LBS. MIN

FOR WIRE TYPE:

MEETS ALL CAT6 SPECIFICATIONS
SOLID OR STRANDED, 23 OR 24 GAUGE
ROUND CORD

SHIELDING MATERIAL:

BRASS WITH NICKEL PLATING

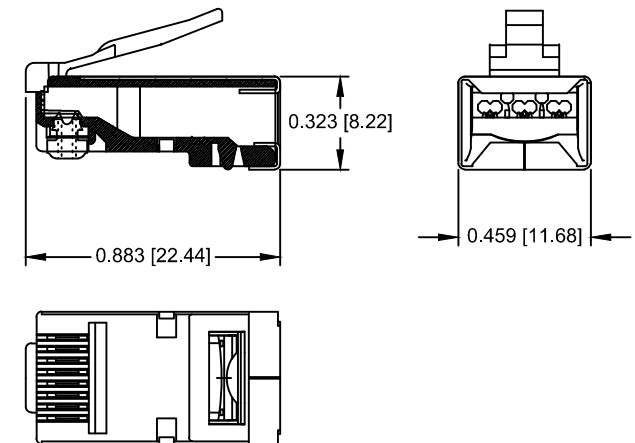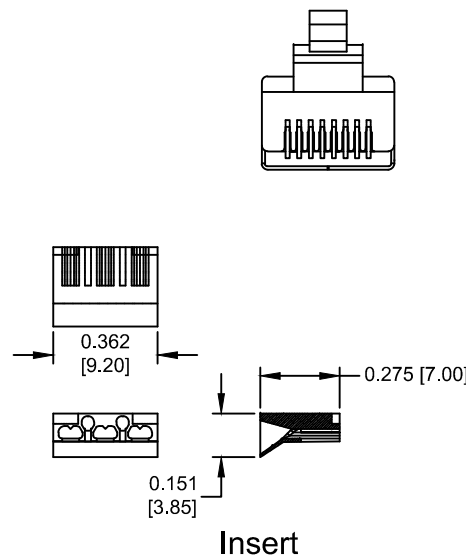

ALLEN TEL PRODUCTS, INC.
30 TV5 DRIVE, HENDERSON, NEVADA 89014

AT8X8RC SH-2324
SHIELDED CAT 6 PLUG