







1.031±0.007
[26.2±0.2]

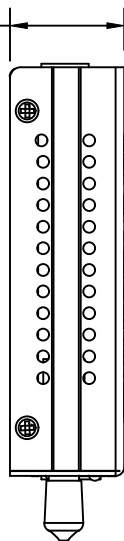

2.776±0.020
[70.5±0.5]

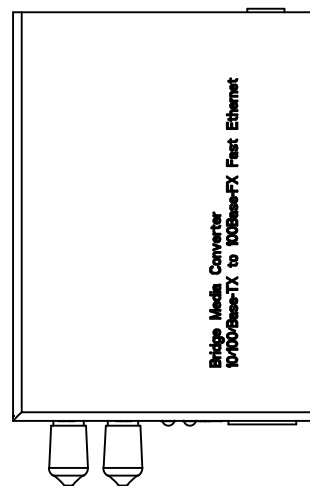

3.701±0.020
[94.0±0.5]

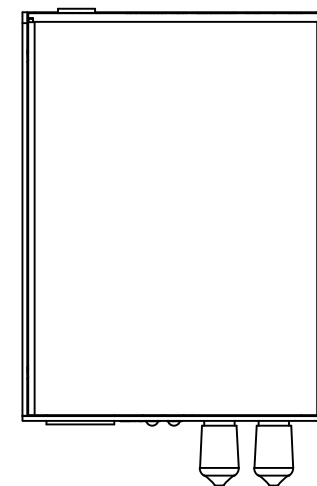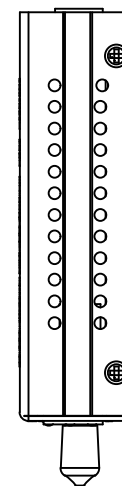

0.610±0.020
[15.5±0.5]

| | |
|---------------------|---|
| Standards | IEEE802.3 IEEE802.3u 10/100Base-TX 100Base-Fx |
| TP Port | RJ45 |
| UTP Cable | Cat.5e cable up to 100m |
| Wave Length | 1310nm/1550nm |
| Fiber Cable(um) | 50/125,62.5/125,or 100/140/um Multimode |
| Max Distance | Multimode:2KM |
| LED Indicators | POWER FDX/COL FX LINK/ACT TP LINK/ACT 100 FULL |
| Flow Control | IEEE802.3x compliant for full-duplex Back pressure flowcontrol for half-duplex |
| Power Control | 2A@+5VDC |
| Ambient Temperature | 0 to 60°C |
| Humidity | 5% to 90% |

NOTES:

1. INCHES [mm] DIMENSIONS ARE REFERENCE.



ALLEN TEL PRODUCTS, INC.
30 TV5 DRIVE, HENDERSON, NEVADA 89014

GBFMC-MM-ST
MULTIMODE MEDIA CONVERTOR