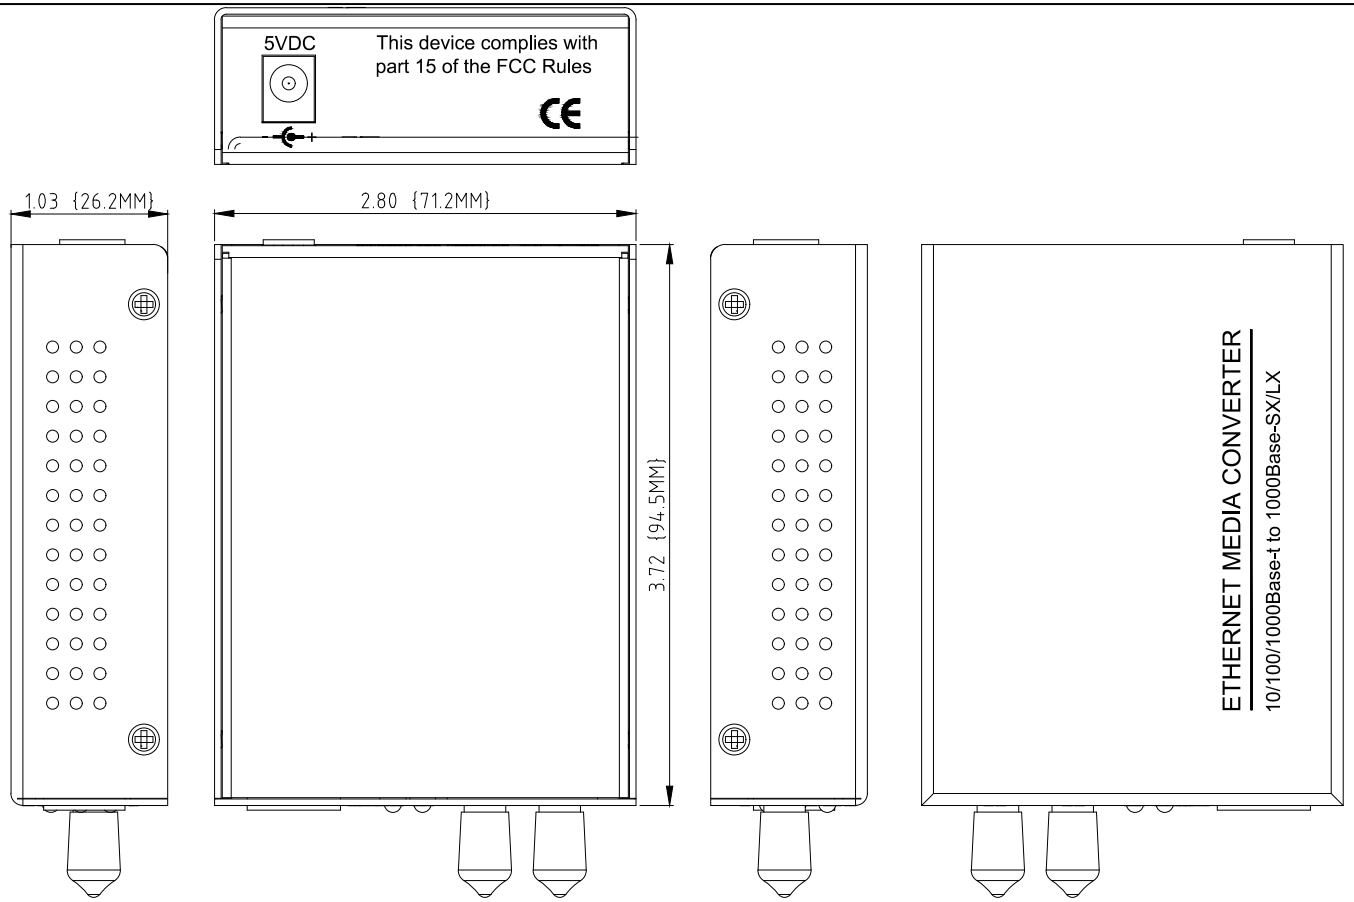

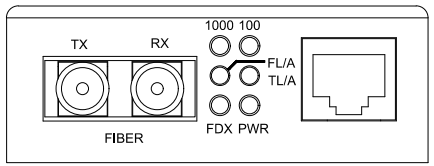

Standards	IEEE802.3 IEEE802.3u 10/100Base-TX 100Base-Fx
TP Port	RJ45
UTP Cable	Cat.5 cable up to 100m
Wave Length	850nm,1310nm/1550nm
Fiber Cable(um)	50/125,62.5/125,or 100/140/um Multimode
Flow Control	IEEE802.3x compliant for full-duplex Back pressure flow control for half-duplex
Power Control	2A@+5VDC
Ambient Temperature	0 to 60°C
Humidity	5% to 90%

RoHS

ALLEN TEL PRODUCTS, INC.
30 TV5 DRIVE, HENDERSON, NEVADA 89014

GBFMC1000-MM-ST
MULTIMODE ST CONVERTOR